


Attic Floor Insulation



BENEFITS OF LOW-E™ ATTIC FLOOR INSULATION:

- Saves Time and Money
- Non-toxic, no fiberglass – no itching
- Perforated, will not trap moisture
- Installs easily with a razor knife
- Superior thermal performance
- Improves insulation system performance
- Insect/Bird resistant
- Can be used with mass insulations
- Reflects up to 97% of radiant heat

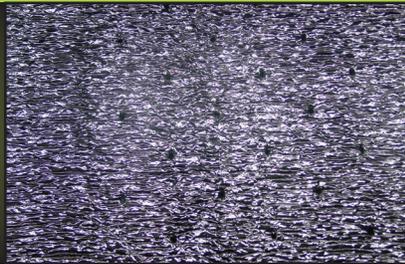

*Easily installed keeps
your living space cool
in summer and warm
in winter*


Want to help keep your home cooler in the summer and warmer in the winter? Try Low-E™ Attic Floor Insulation. As temperatures rise in the summer, your attic can be the biggest source of heat gain in your home. In much the same way, it can also be the biggest source of heat loss in the winter. Low-E™ Attic Floor Insulation can help combat that heat gain/loss by reflecting up to 97% of radiant heat. Used in conjunction with mass insulation, Low-E™ Attic Floor Insulation provides superior thermal performance. It is easily installed, will not trap moisture and is insect and bird resistant.



Discover even more ways to lower energy costs with ESP® LOW-E Insulation



Scan code to see
Install Guide

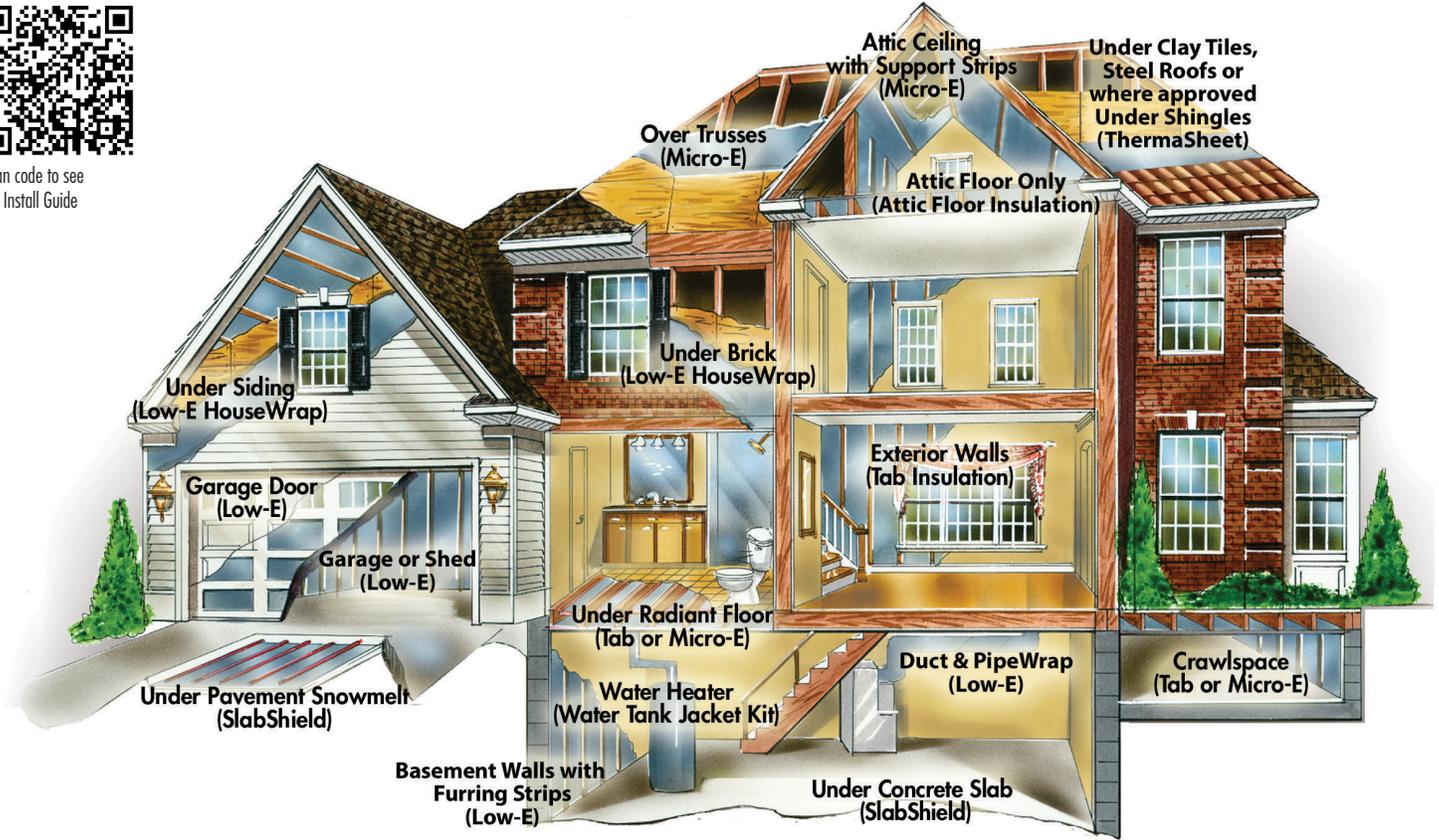

Green building is not just a trend, but the wave of the future as more and more homeowners and builders demand energy efficient homes and products. ESP® Low-E Insulation products are designed for maximum energy and cost efficiency. Whether it's under slab, under roof, around duct work or wrapping the entire house, ESP® LOW-E Reflective Insulation products save more money on heating and cooling than regular insulation and Housewrap. Check out all the ways ESP® LOW-E Insulation can help reduce your energy consumption around the home.

LOW-E Attic Floor Insulation

PRODUCT CODES: 4PMPA-SL, 24PMPA-SL

PRODUCT DIMENSIONS & DESCRIPTIONS: Double sided scrimless aluminum foil laminated to polyethylene foam perforated (1/8" nominal thickness)

WIDTH: 4' LENGTH: 125'

R-VALUE* (attic floor application): R-5.5 down R-2.3 up

PERM RATING: ASTM E-96 5.18 perms or 51.55 grams/ (day-m²)

CRITICAL RADIANT FLUX: ASTM E-970 > .12 w/cm² (no ignition)

EMITTANCE: ASTM C-1371 0.03

NOTE: LOW-E™ ATTIC FLOOR INSULATION is designed for use in residential attic floor spaces only.

R-value includes core material value and low emittance air film value for upward and downward heat flow respectively

*R-values vary depending on facing and assembly.

Specific R-values for specific applications can be obtained from Install Guide at www.low-e.com or by contacting ESP, Inc. at 1-800-289-5693

ESP, Inc strives to provide the most accurate R-value data possible. The R-values set forth in this document are the reflection of a combination of industry standard testing and conscientious calculation. However, these numbers, even within specific applications, can fluctuate due to the multiple variables that influence R-value.

CAUTION: Aluminum is an Electrical Conductor. Please use caution when working around electrical sources including overhead power lines. Carefully inspect electrical junction boxes and check for frayed wires before beginning installation.

WARNING: Although ESP LOW-E® Insulation Products are all fire tested to ASTM and/or NFPA standards; it is recommended that they or any insulation material should not be exposed to open flame or other ignition sources of sufficient intensity during shipment, storage or installation.

Low-E™ Insulation • Low-E™ Housewrap • Low-E™ Slabshield

For more information and a free sample of Low-E™ material, or for the dealer nearest you visit www.low-e.com or call:

ESP CORPORATE
800-289-5693

LOW-E™ UK
0151-494-9994

LOW-E™ GULF SOUTH
800-809-2734

LOW-E™ MIDWEST
800-769-8818

LOW-E™ NORTHEAST
800-560-5693

LOW-E™ MID SOUTH
800-560-5693

LOW-E™ SOUTHWEST
877-565-5693